



JOCMB35Ck-D8P/S Series

Rev.A.1.0

DESCRIPTION:

The products are 8-pin optical relays. The device consists of an AlGaAs infrared emitting diode input stage optically coupled to a high-voltage output detector circuit in a plastic DIP8 package with different lead forming options. The detector consists of a

The prod b q n r arc d IT /p n q 9he

Soldering Temperature	T_{sol}	260	
-----------------------	-----------	-----	--

NOTE1 100 μ s pulse, 100Hz frequency

NOTE2 AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS (Temperature=25°C)


Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V_F	$I_F=10mA$	-	1.2	1.5	V
	Reverse Current	I_R	$V_R=6V$	-	-	1	μA
	Action Current	$I_{F(ON)}$	$I_L=I_{L(MAX)}$	-	0.9	3	mA
	Reset Current	$I_{F(OFF)}$	$I_L=I_{L(MAX)}$	0.4	0.8	-	mA
Output	On Resistance	R_{on}	$I_F=5mA$ $I_L=Max.$ Within 1s on time	-	-	5	Ω
	Off State Leakage Current	I_{Leak}	$I_F=0mA$, $V_L=Max.$	-	-	1	μA
	Off State Capacitance	C_{off}	$I_F=0mA$	-	6	-	pF
Switching Characteristics	Isolation Resistance	R_{ISO}	DC500V 40~60%R.H.	10^{12}	-	-	Ω
	Floating Capacitance	C_{IO}	$V=0$, $f=1MHz$	-	-	1.5	pF
	Turn On Time	t_{on}	$I_F=5mA$, $I_L=Max.$	-	10	100	μs
	Turn Off Time	t_{off}	$I_F=5mA$, $I_L=Max.$	-	30	100	μs

ORDERING INFORMATION

J	OC	M	B	3	5	C	k	-D8P/S	/
JieJie Microelectronics Co., Ltd.	Opto Coupler	MOS	B:2NO	3:V _O 60V	5:I _O :0.18A	C:I _{FT} 3mA	High speed	P:DIP8 S:SMD8	S:T3 L:T4

Packing Quantity	
Option	Quantity
DIP	50 Units/Tube
SMD	1200 Units/Reel

MARKING

	
---	--

Characteristics Curves

FIG.1: LED Dropout Voltage vs. Ambient Temperature








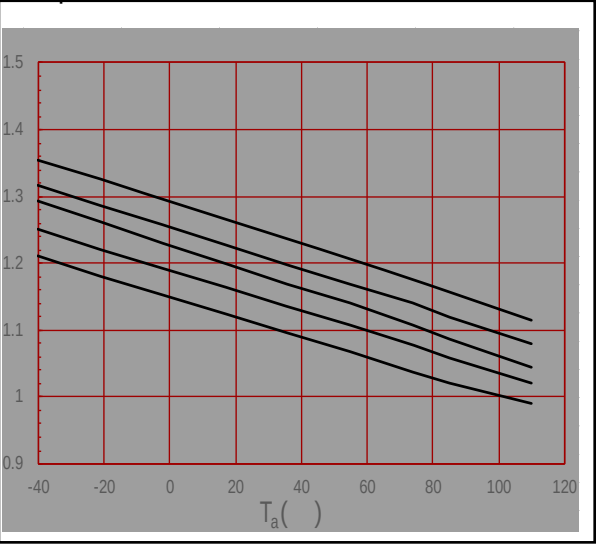


FIG.2: Output Current vs. Output Voltage

FIG.7: Turn On Time vs. Ambient Temperature**FIG.8: Turn Off Time vs. Ambient Temperature****FIG.9: Turn On Time vs. LED Forward Current****FIG.10: Turn Off Time vs. LED Forward Current****FIG.11: Off State Leakage Current vs. Load Voltage****Fig.12: Turn on/Turn off time**


Package Dimension (Unit: mm)

Standard DIP Type:

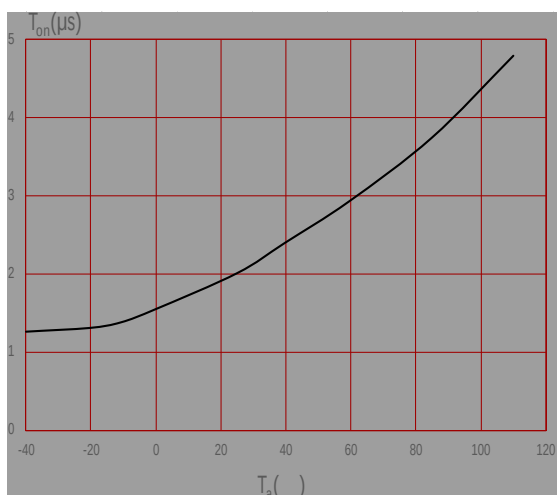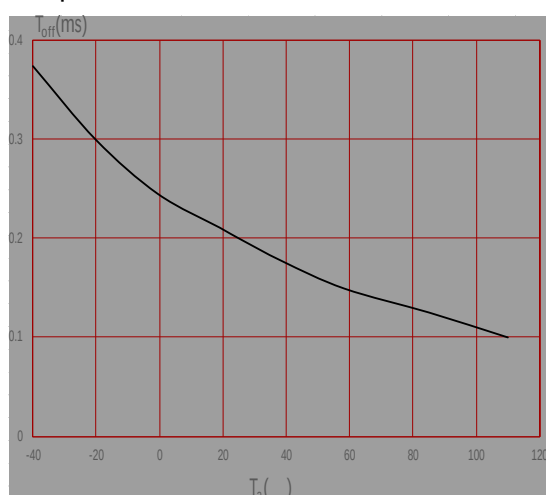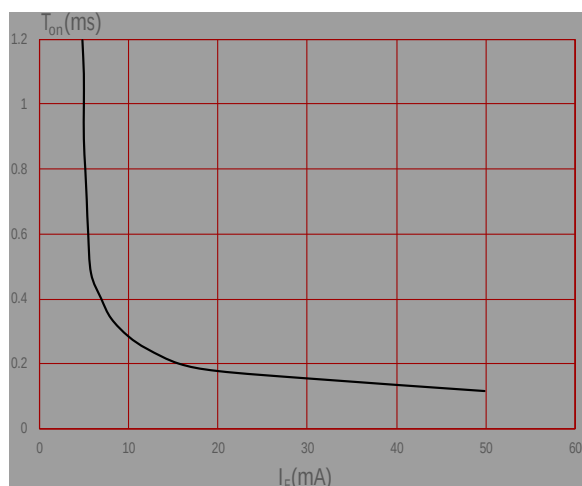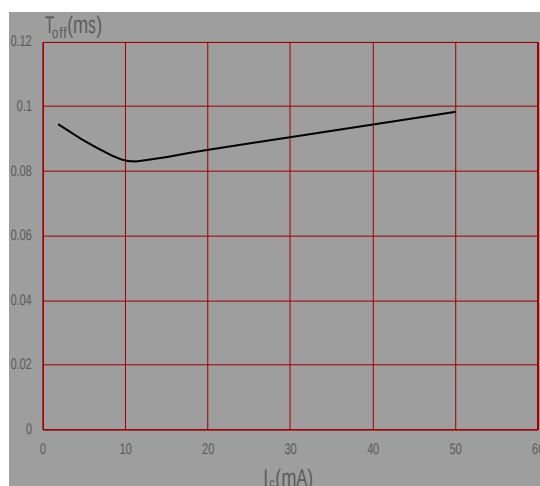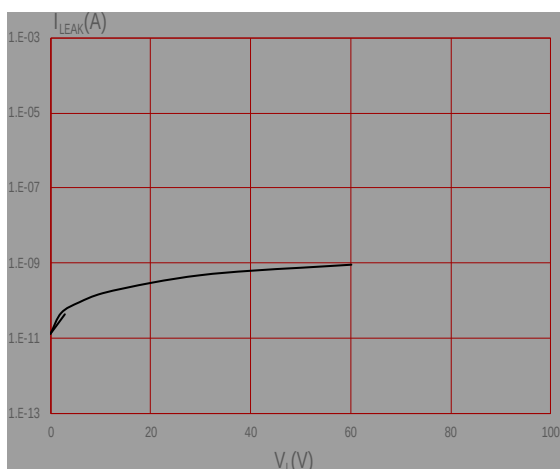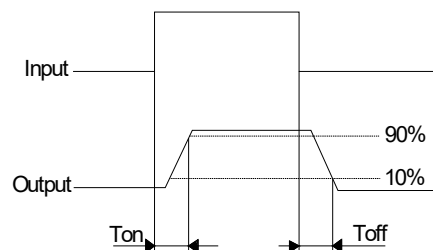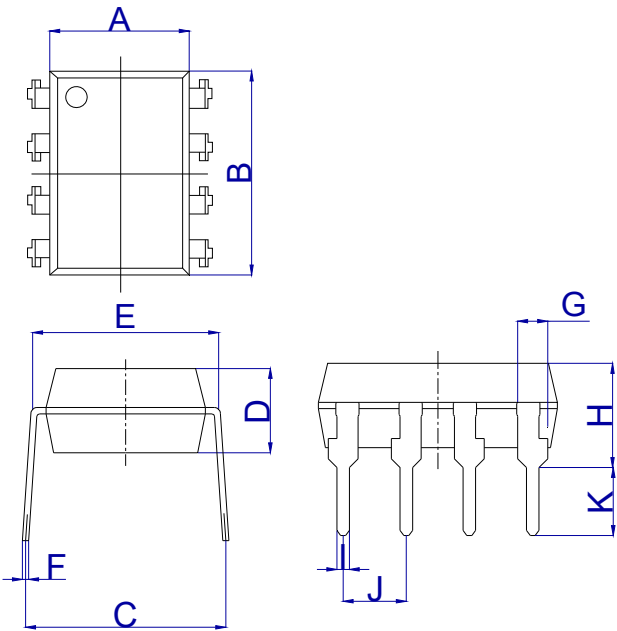


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.20		6.60	0.244		0.260
B	9.40		9.80	0.370		0.386
C	7.15		8.95	0.281		0.352
D	3.20		3.60	0.126		0.142
E	7.32		7.92	0.288		0.312
F	0.15		0.35	0.006		0.014
G	0.90		1.50	0.035		0.059
H	3.90		4.50	0.154		0.177
I	0.40		0.60	0.016		0.024
J	2.29		2.79	0.090		0.110
K	2.24		3.24	0.088		0.128

Option SMD Type:

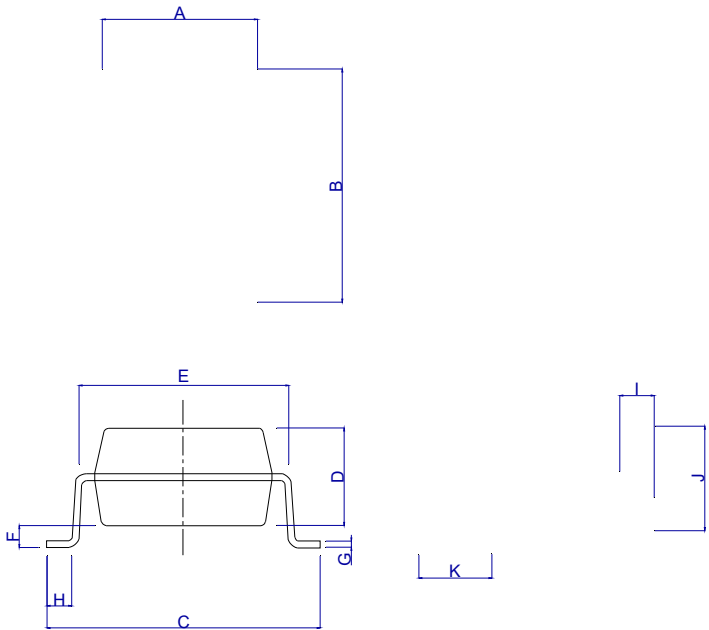


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A						
B						
C						
E						

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

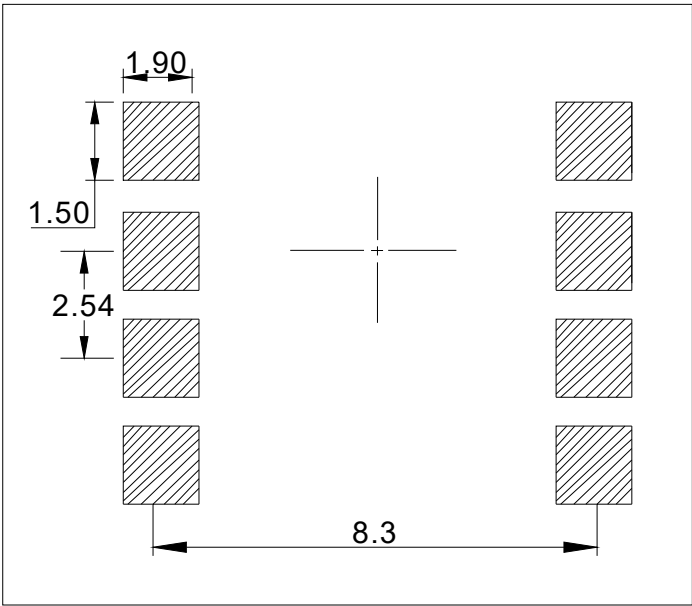


CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option S/L

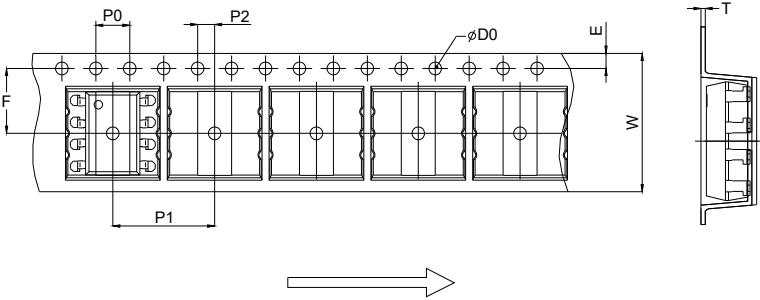


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	11.90	12.00	12.10	0.469	0.472	0.476
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.35	0.40	0.45	0.014	0.016	0.018
W	15.90	16.00	16.20	0.626	0.630	0.638

REFLOW INFORMATION

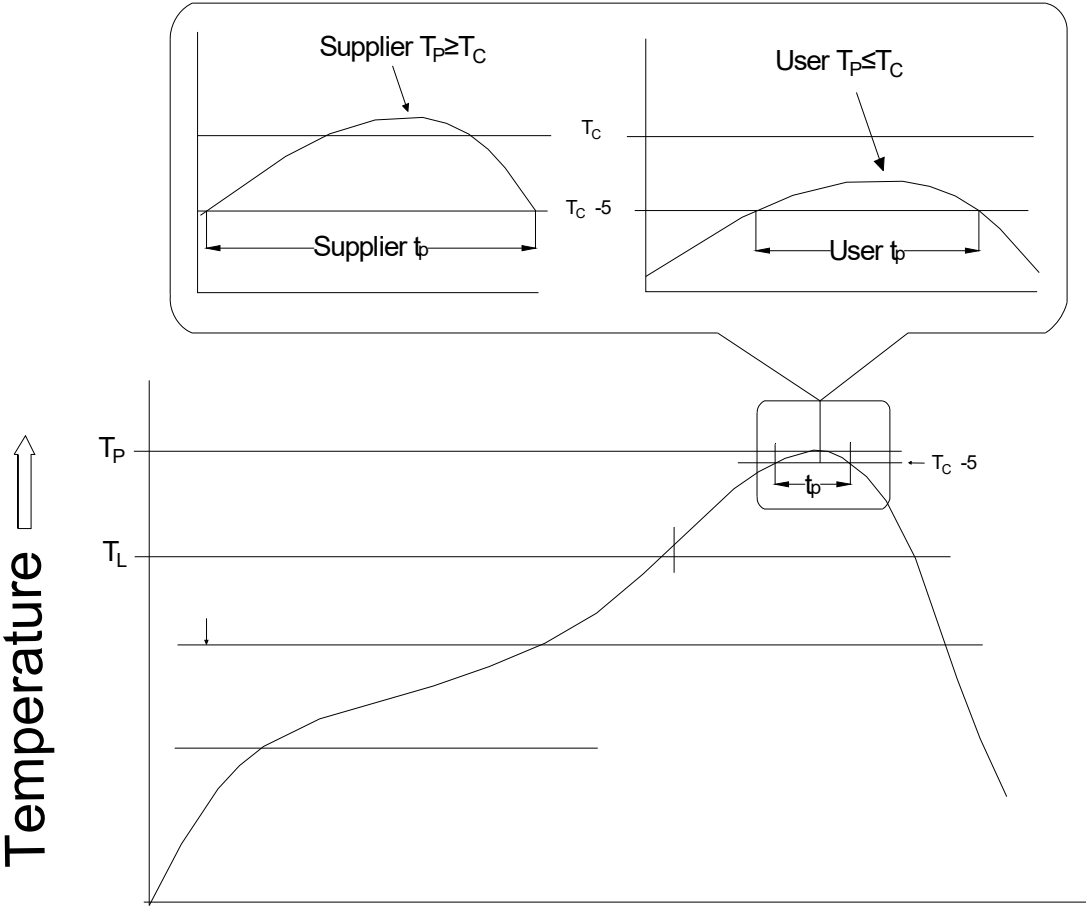

WAVE SOLDERING

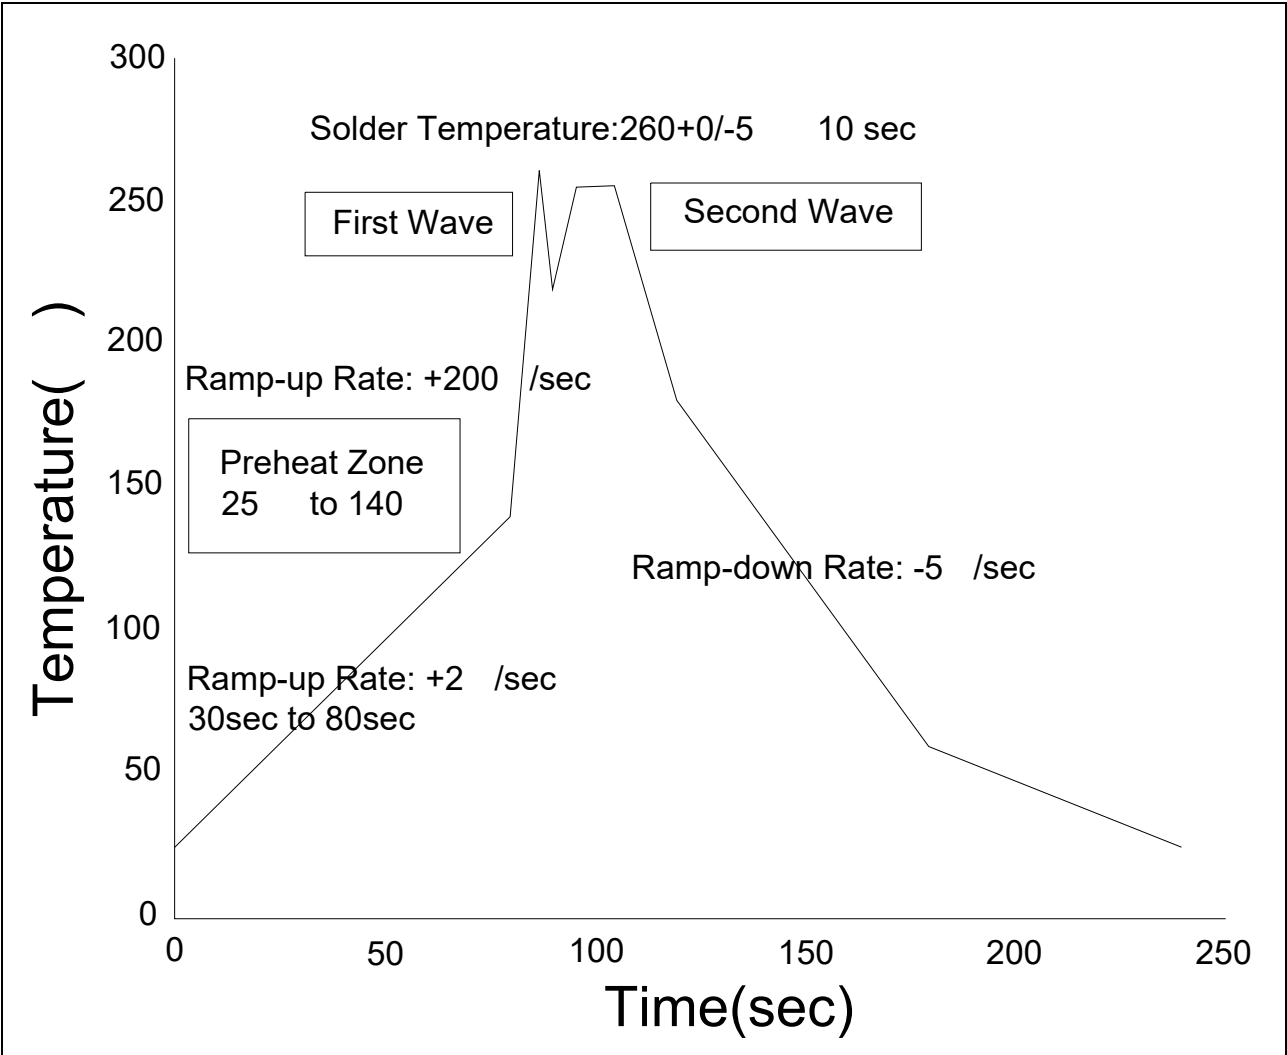

HAND SOLDERING BY SOLDERING IRON	
Soldering Temperature	360 5
Soldering Time	3s max.

