




DESCRIPTION:

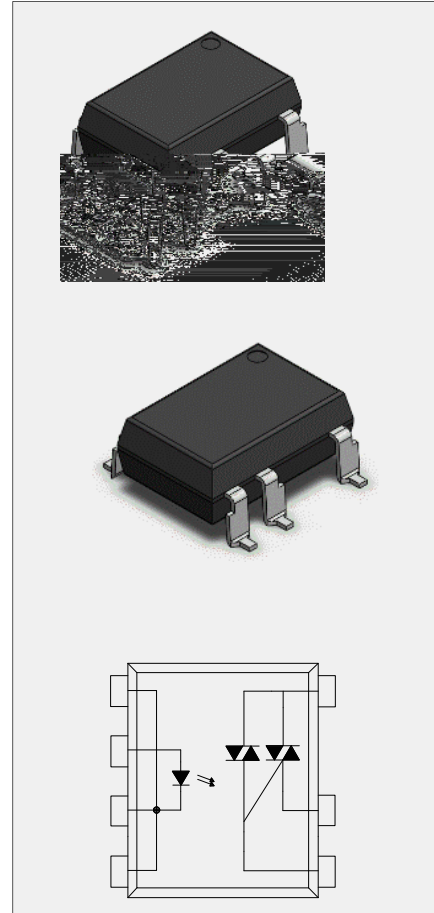

MAIN FEATURES:

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
			①	
		)		
		)		
		)		
	C	)		




Characteristics Curves

FIG.1:

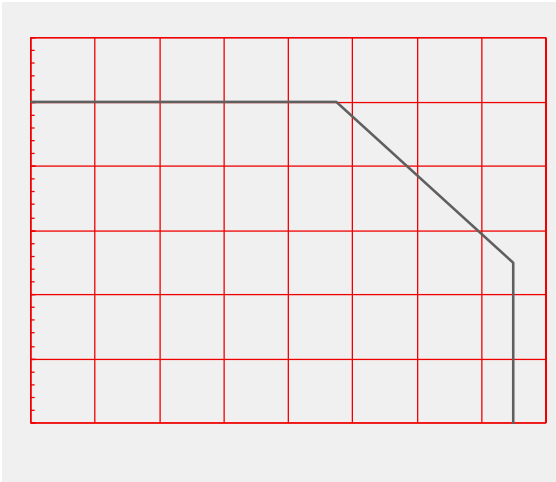


FIG.2:

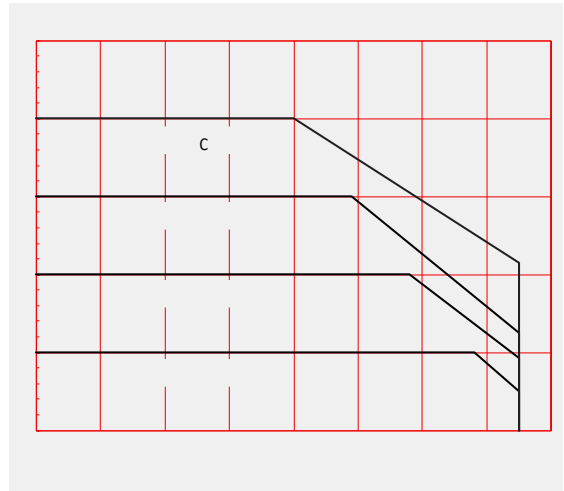


FIG.3:

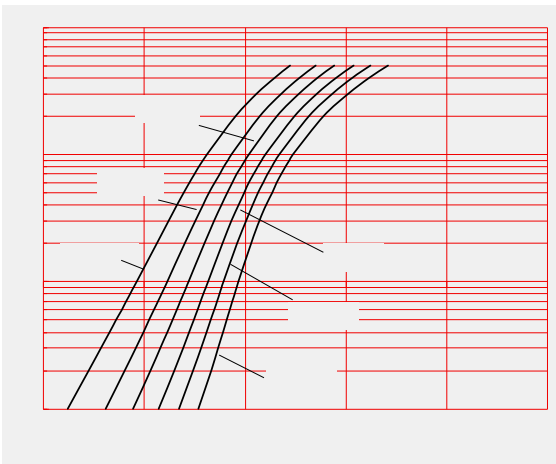


FIG.4:

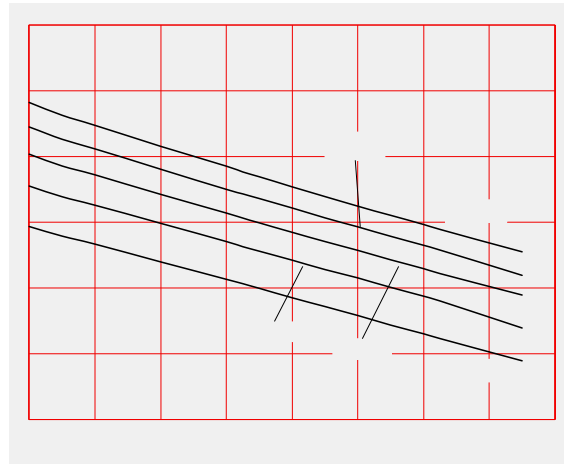


FIG.5:

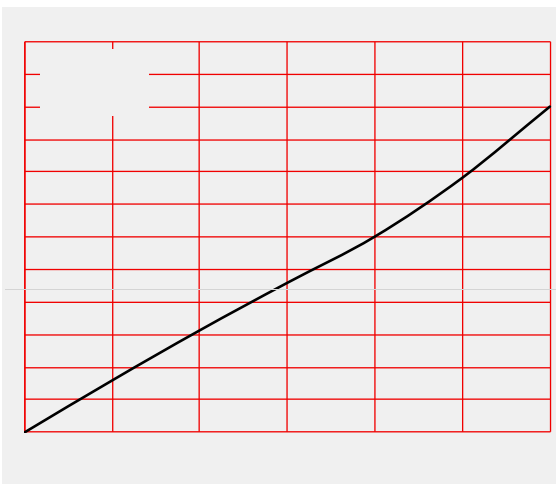


FIG.6:

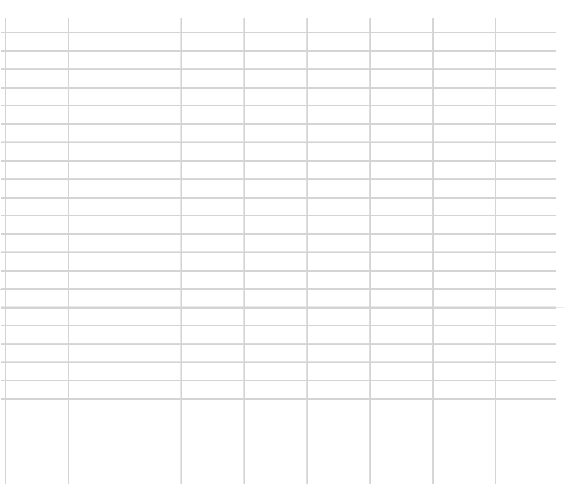


FIG.7:

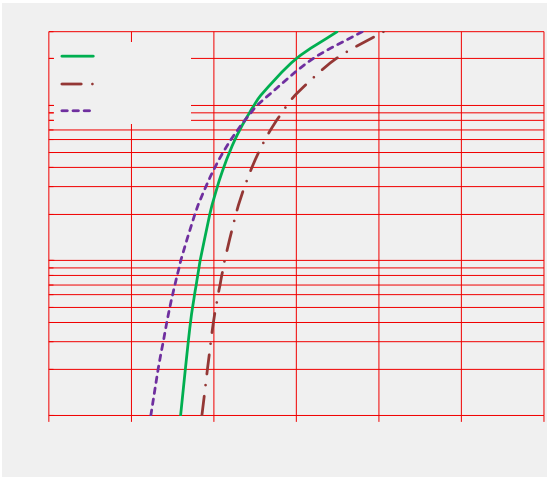


FIG.8:


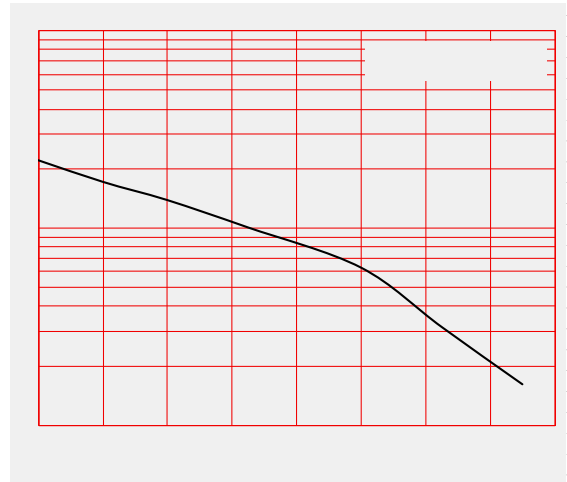


FIG.9:

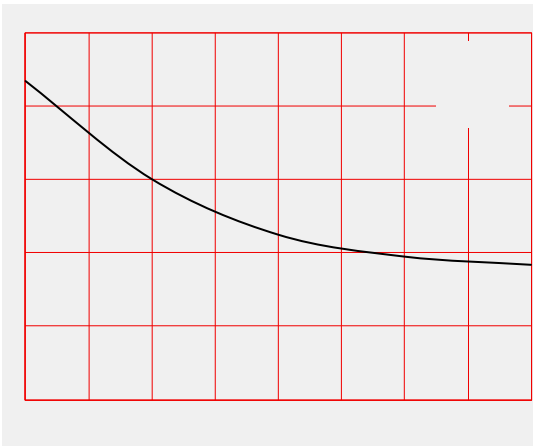

TEST CIRCUITS

FIG.10:


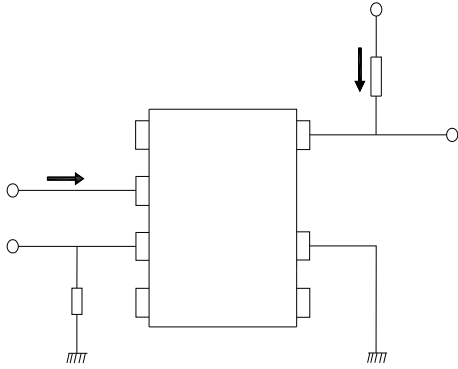



FIG.11:

FIG.12:



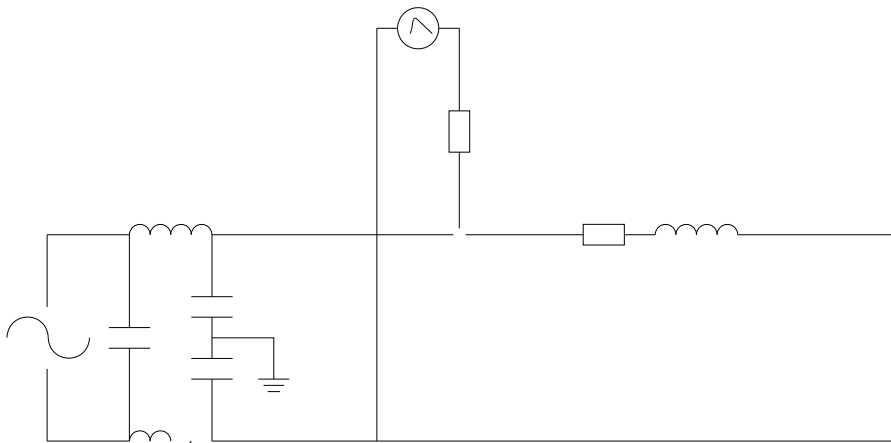


RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

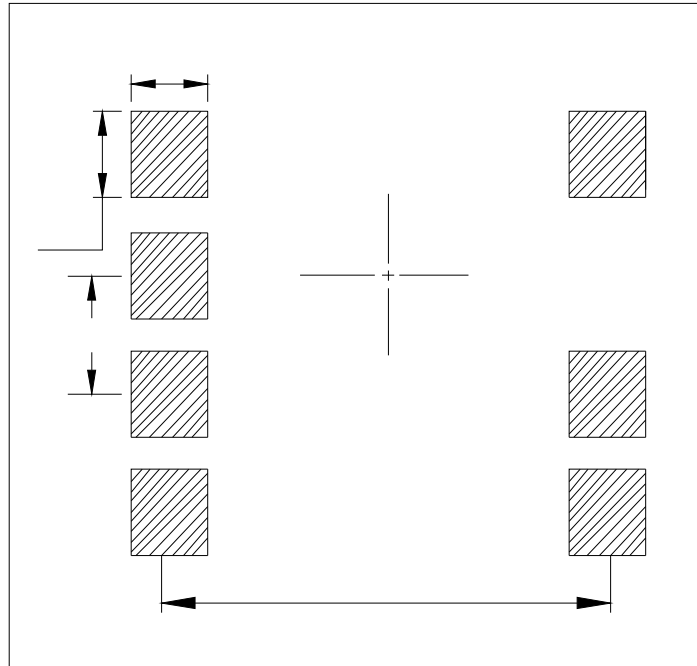



TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard DIP

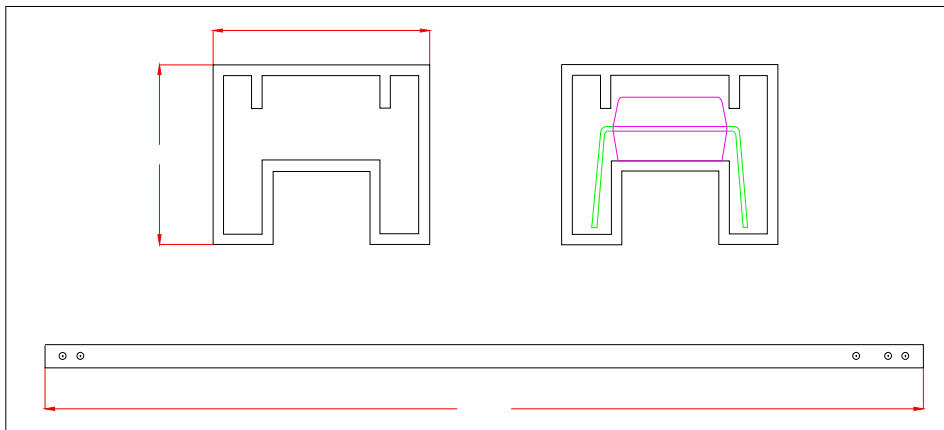


**CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)**

Option S/L

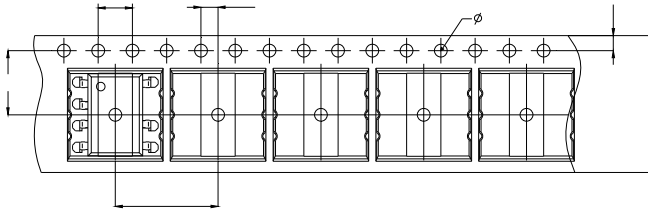



REFLOW INFORMATION

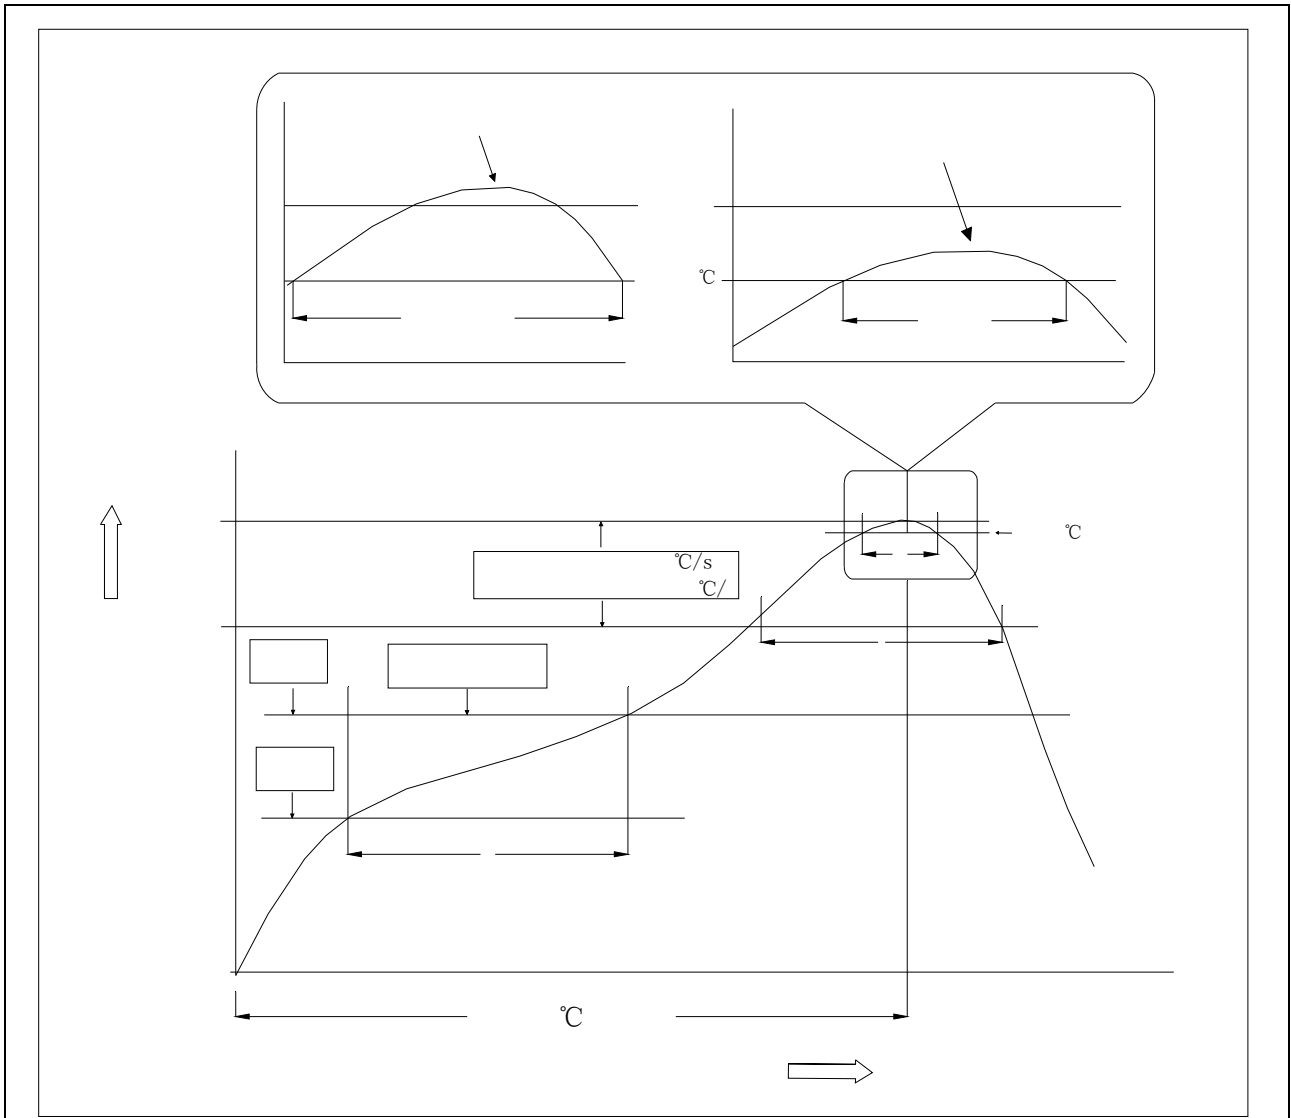

	°C
	°C
	°C
	°C
	°C °C °C
°C °C	
	°C

WAVE SOLDERING

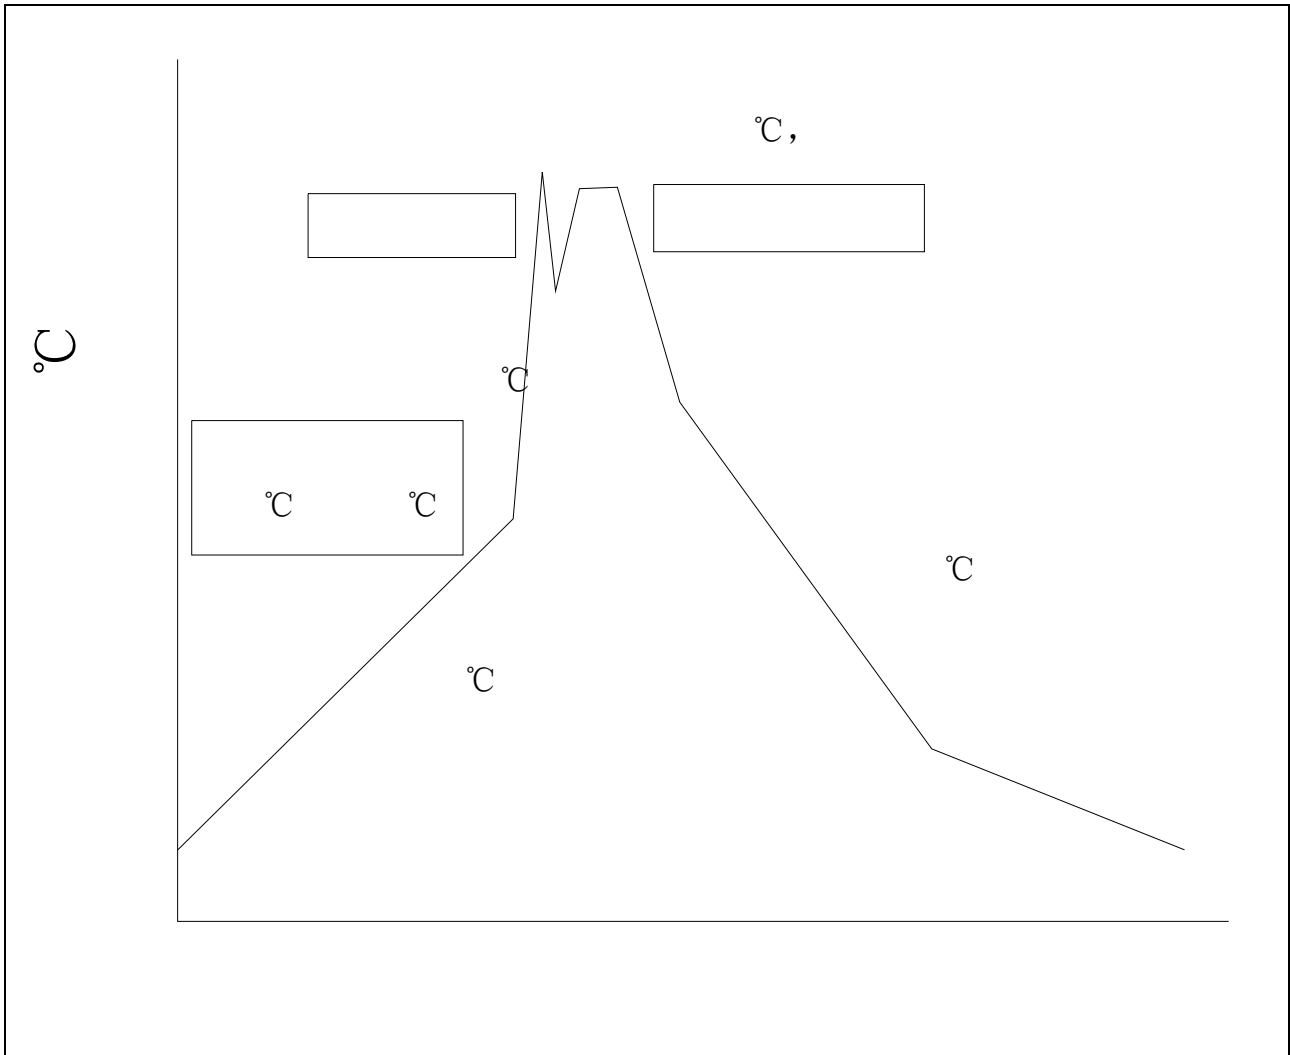

<b>HAND SOLDERING BY SOLDERING IRON</b>	
	$\pm$ °C

