




DESCRIPTION:

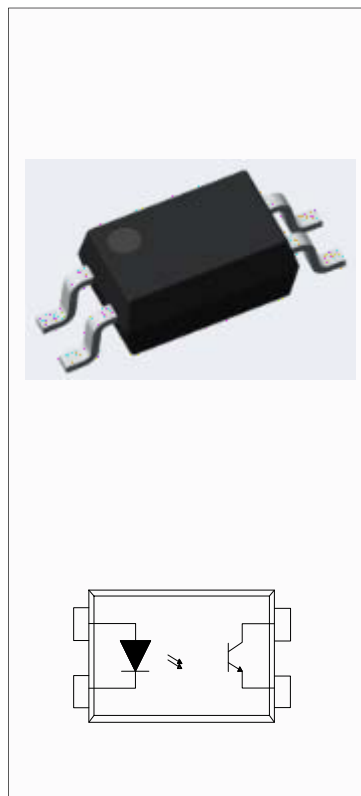

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit

NOTE1: 1 μ s pulse **NOTE2:** AC for 1minute, R.H.=40~60%


ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

NOTE1: Rank Table of Current Transfer Ratio (Temperature=25°C)


Grade Sign	Min. (%)	Max. (%)
None	80	600
A	80	160
B	130	260
C	200	400
D	300	600
E	400	600
Q	100	200

ORDERING INFORMATION

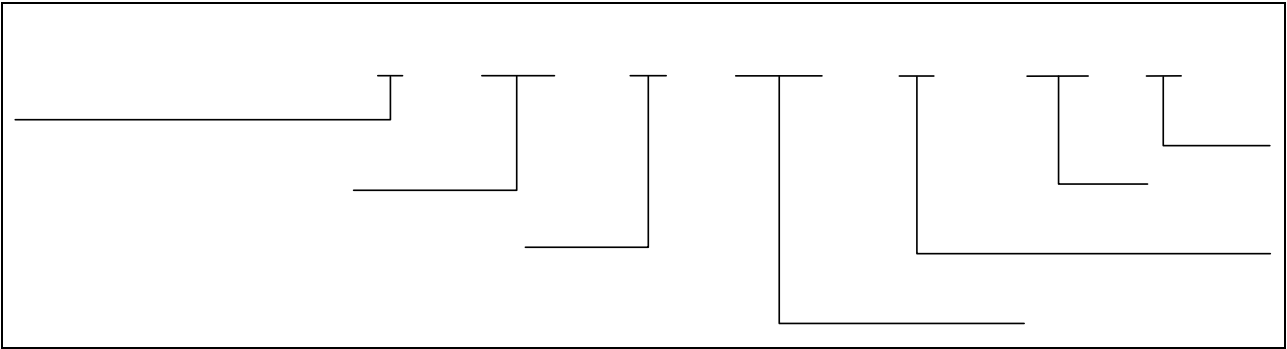

Packing Quantity	
Option	Quantity
None/R	3000 Units/Reel

MARKING

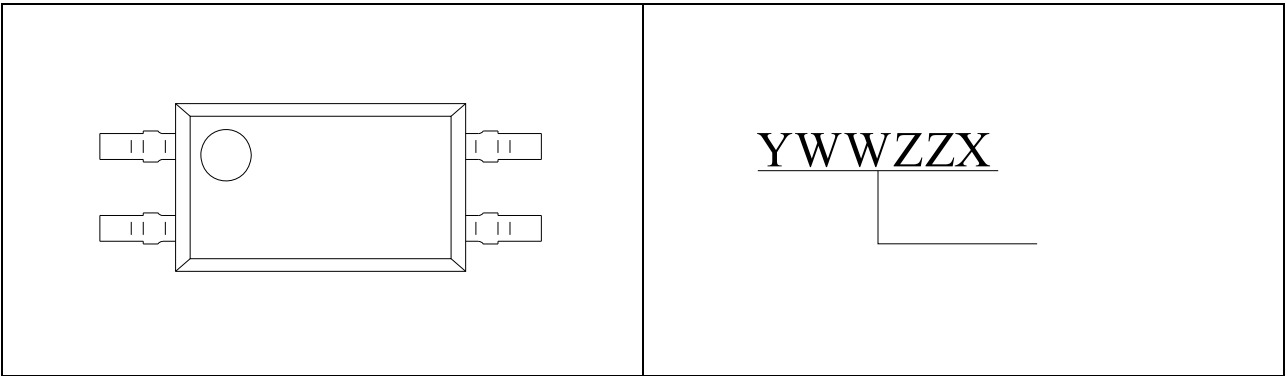

Characteristics Curves

FIG.1:

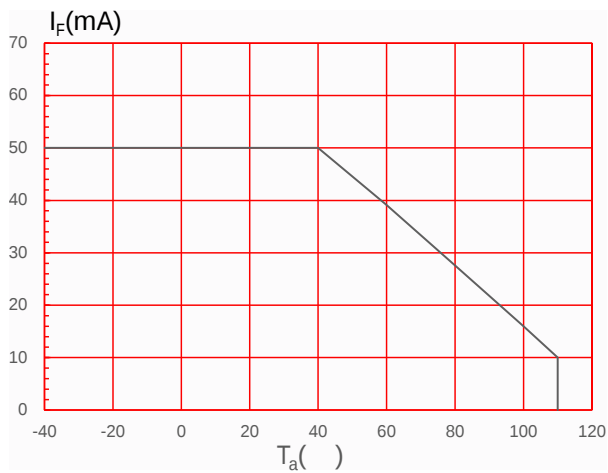


FIG.2:

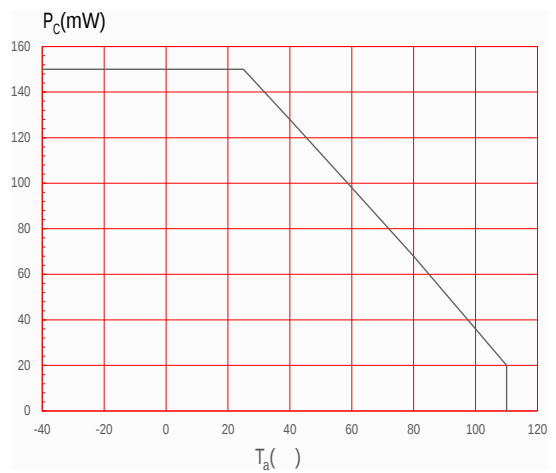


FIG.3:

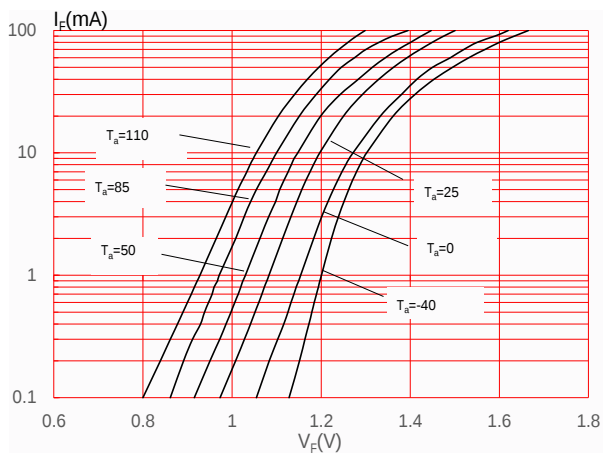


FIG.4:

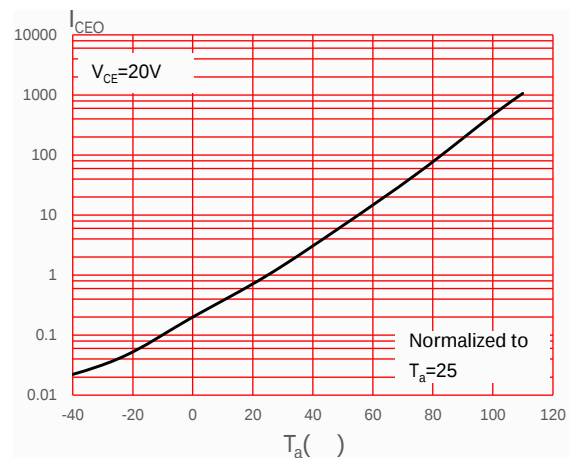


FIG.5:

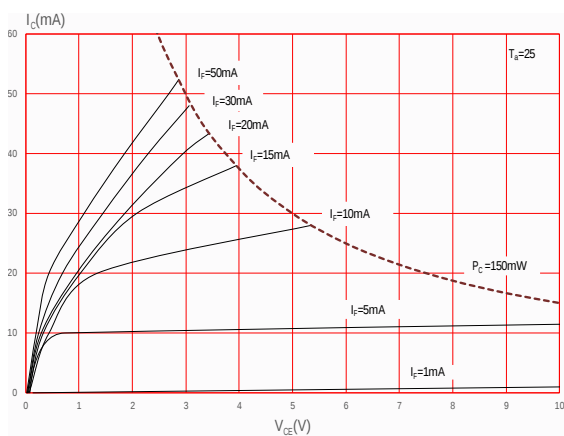


FIG.6:

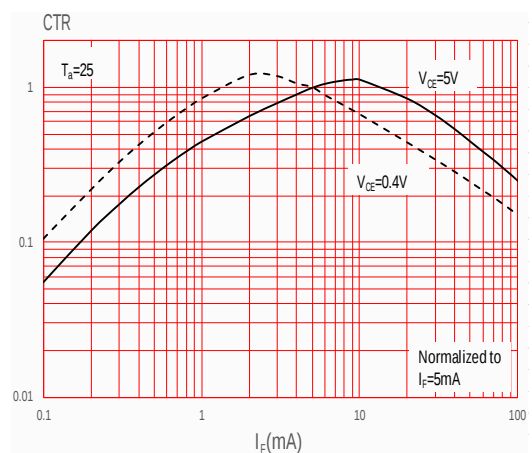


FIG.7:

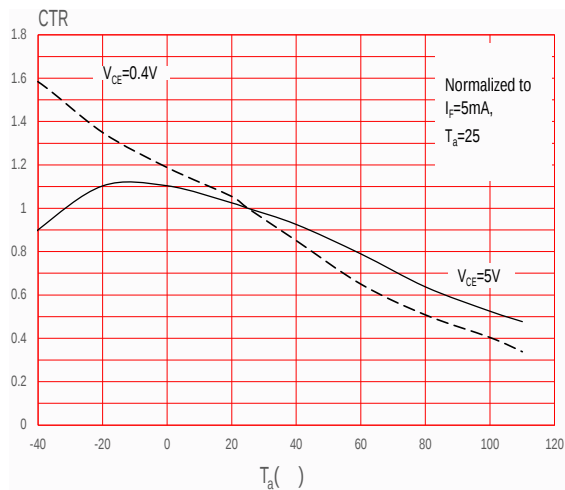


FIG.8:

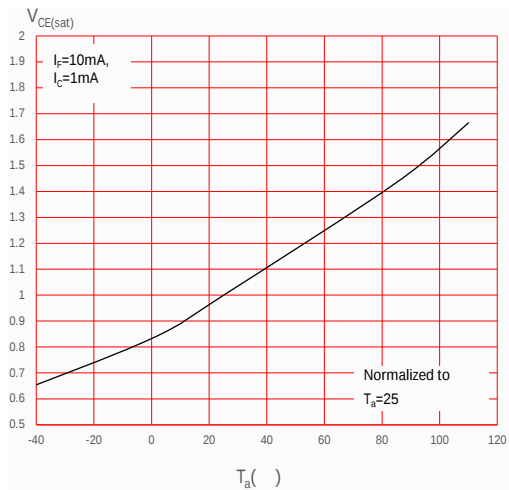


FIG.9:


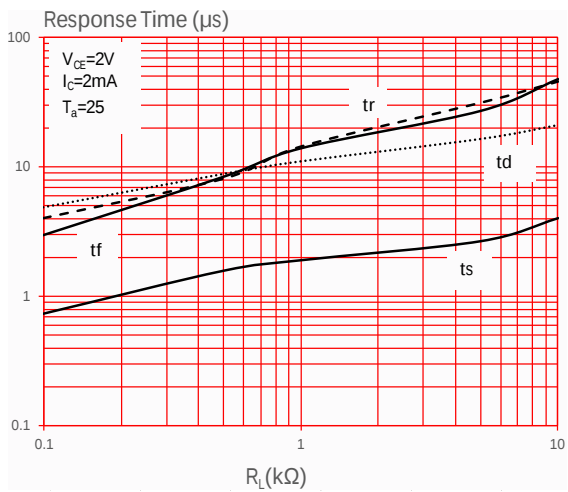


FIG.10:

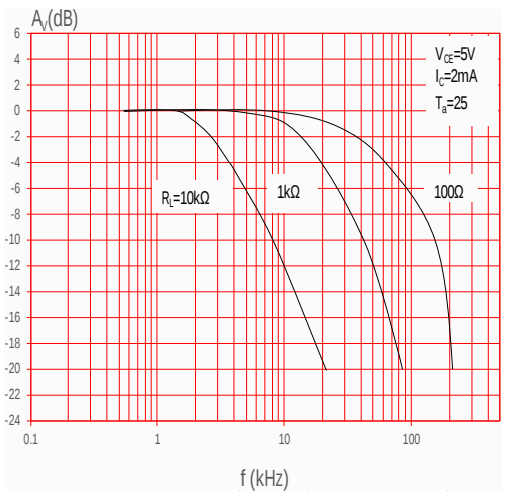

Test Circuits

FIG.11:

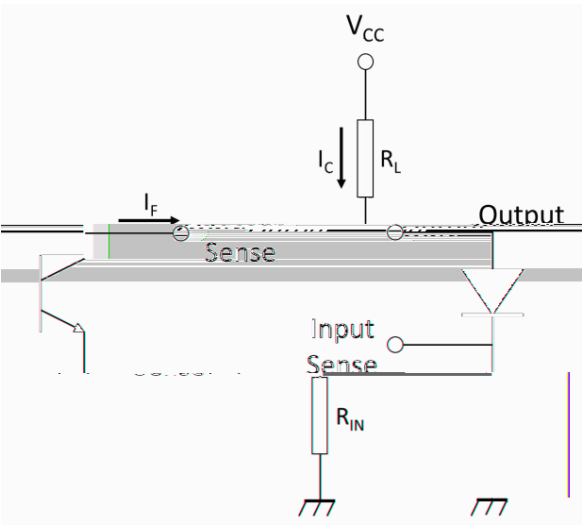


FIG.12:


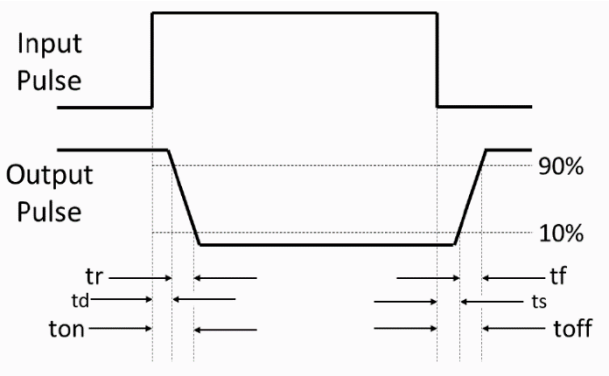



FIG.13:

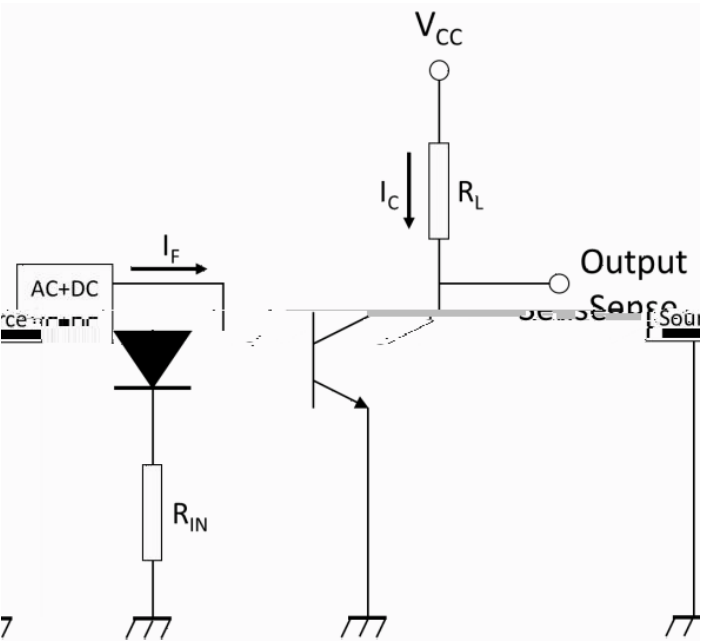


[illegible]

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Option None/R

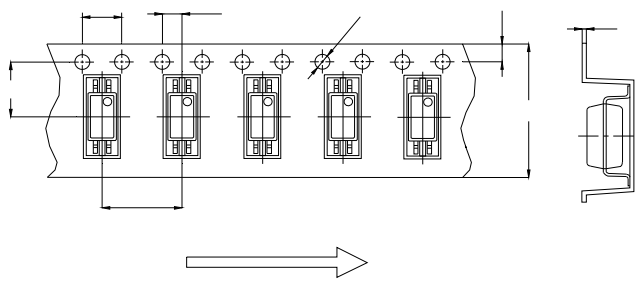

REFLOW INFORMATION

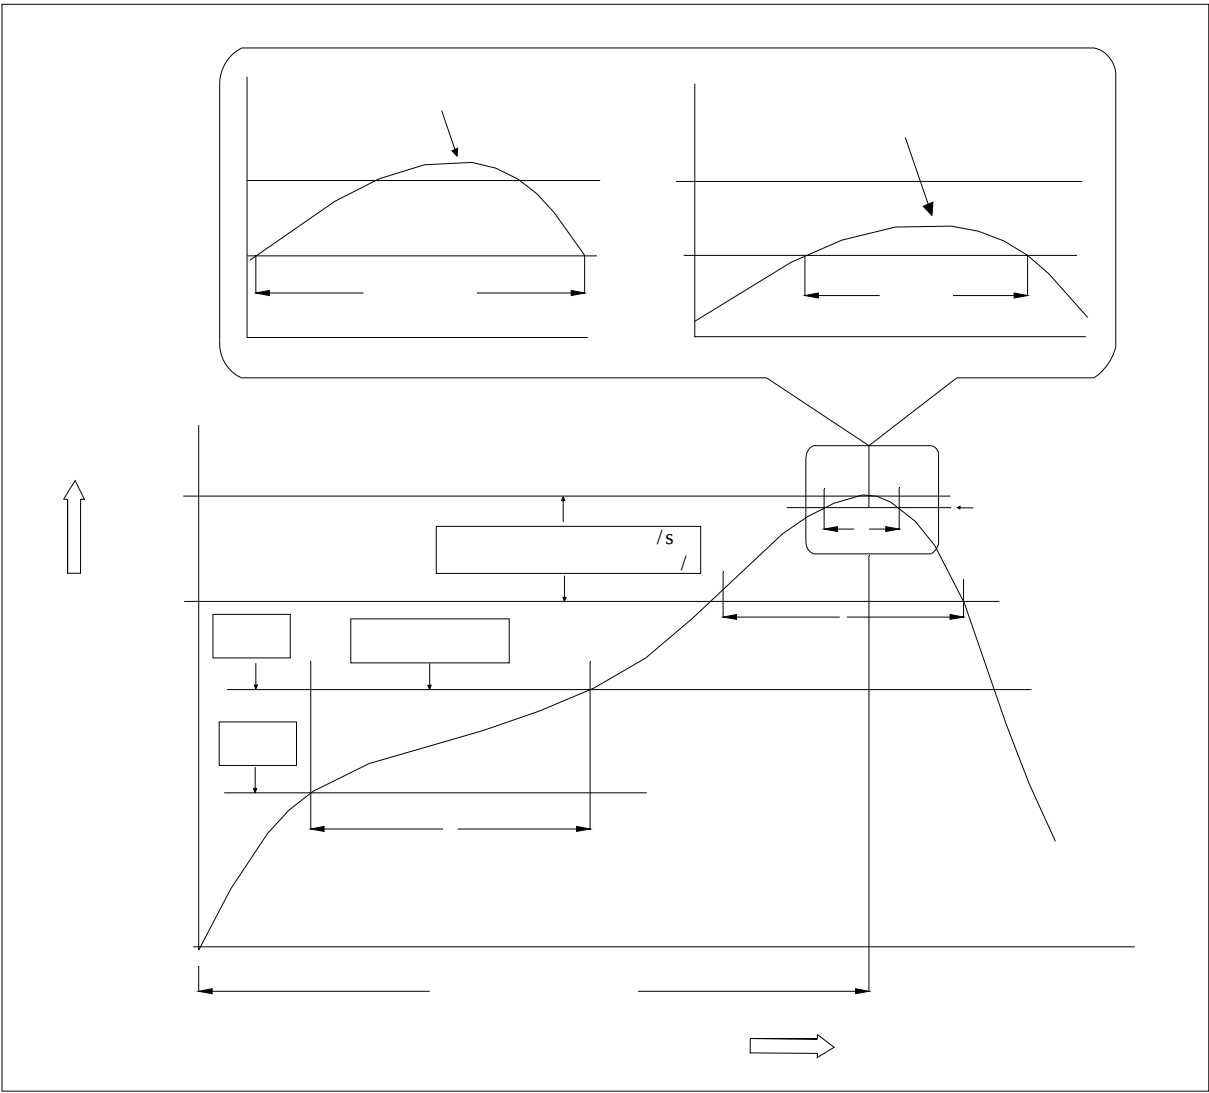

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile

