



650	20A	F	B
20	65		

Key features:

-
-
-

Features:

-
-
-
-
-
-



Applications:

-
-
-

Package dimensions



S m b l

Pa ame e

Val e

U i

⑤ 7A·IT H°—7⑤



S mb l	Pa ame e	Te c di i	Val e			U i
			Mi .	T .	Ma .	
		μ				
						μ

S mb l	Pa ame e	Te c di i	Val e			U i
			Mi .	T .	Ma .	

All d c i f a i c i g l a d b j e c l e g a l d i c l a i e









S mb l	Pa ame e	Te c di i	Val e			U i
			Mi .	T .	Ma .	
		Ω				
		Ω				









Elec ical cha ac e i ic fDi de

S mb l	Pa ame e	Te c di i	Val e			U i
			Mi .	T .	Ma .	
		μ				
		μ				



T ical e f ma ce cha ac e i ic

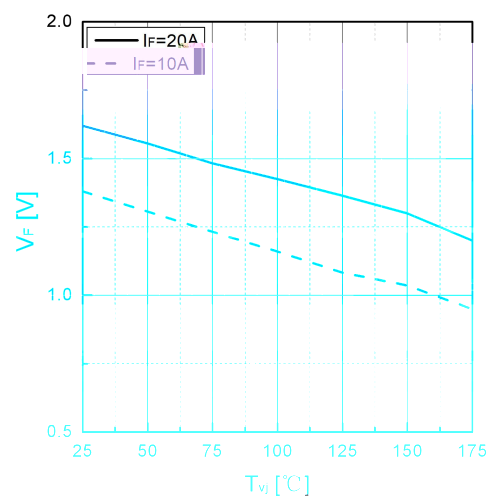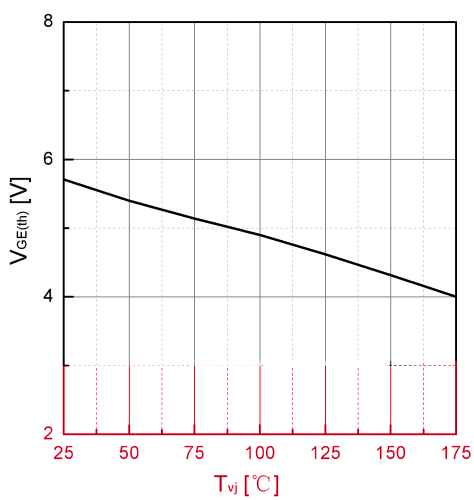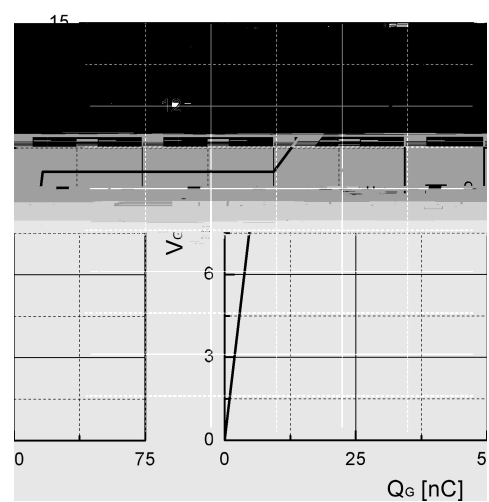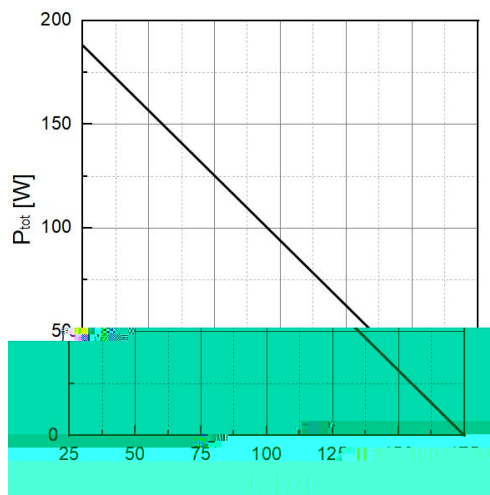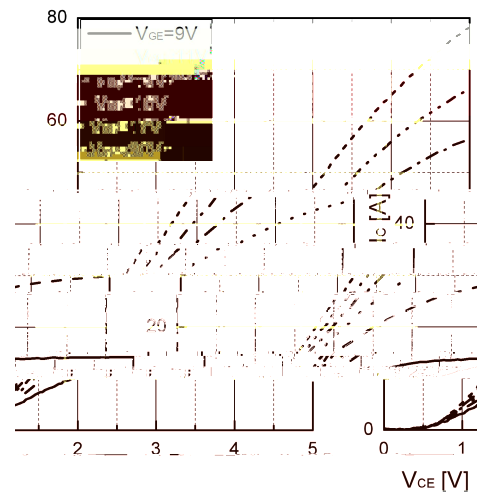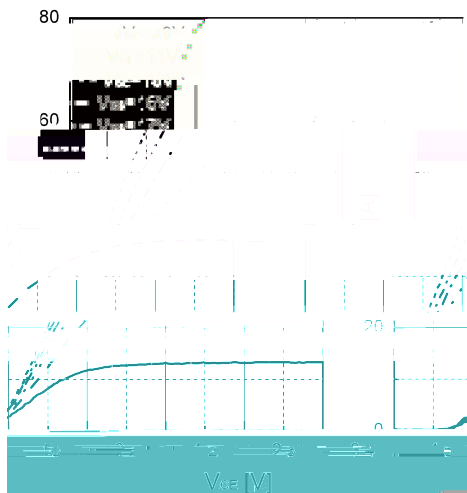

T ical e f ma ce cha ac e i ic

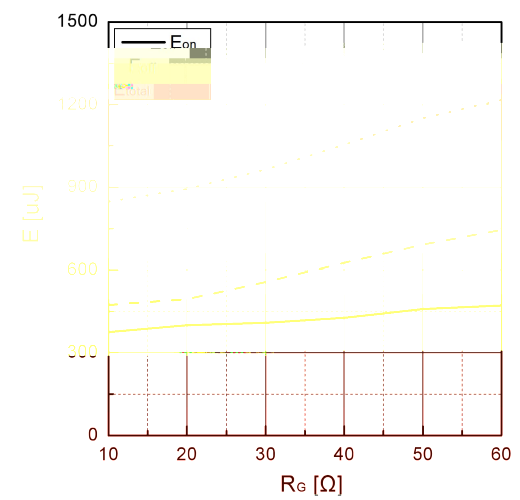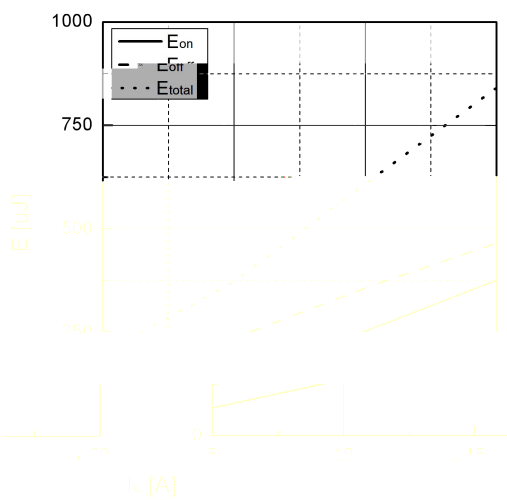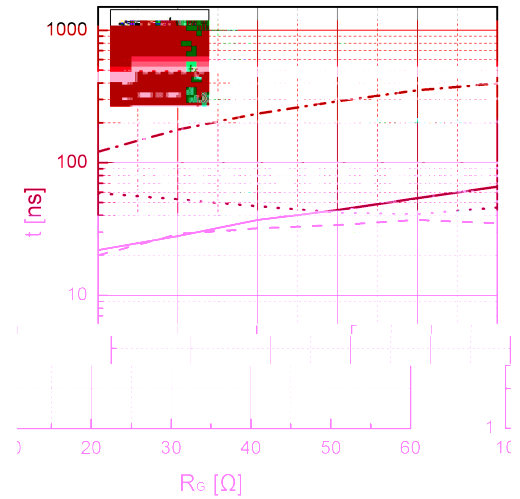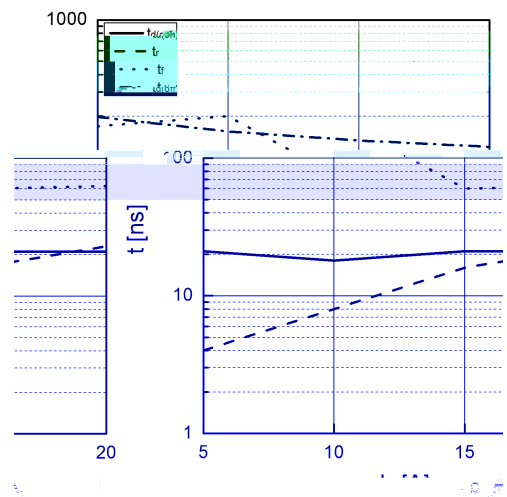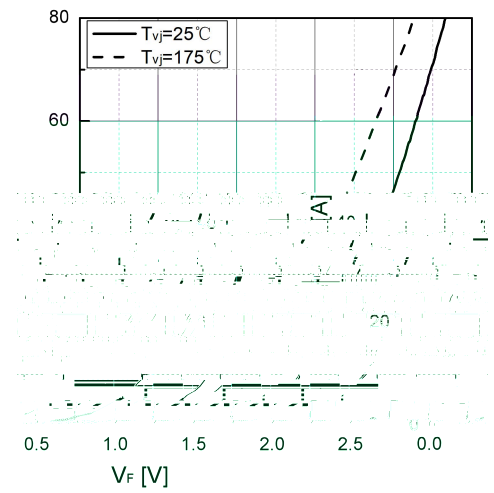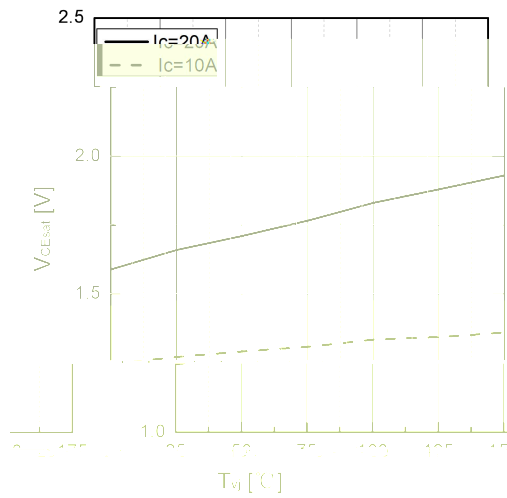

Typical performance characteristics

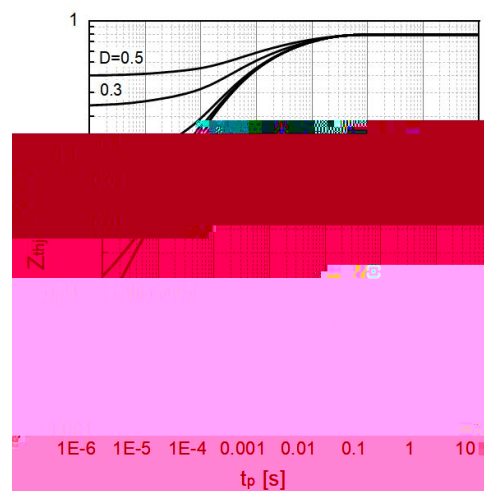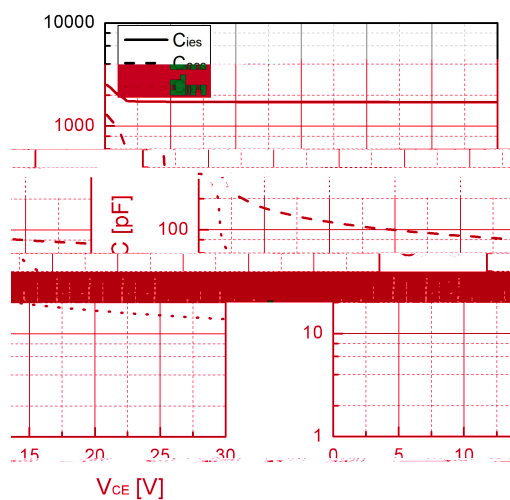

Package dimensions

