



Diode Module

Features

- A package of series of two diodes
- Heat transfer through alumina ceramic and metal substrate
- Welding by vacuum welding technology, which provide high reliability

Product Summary

Parameter	Value	Unit
V_{RRM}	1800	V
$I_{F(AV)}(@ T_C = 100^\circ\text{C})$	136	A
$I_{FSM}(@ t_p = 10\text{ms})$	3640	A
$V_F(\text{Max})$	1.60	V

Applications

- AC converter
- Inverter
- DC motor

Absolute Maximum Ratings (@ $T_C = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Conditions	Symbol	Values	Unit
Repetitive peak reverse voltage	$T_{vj} = 25^\circ\text{C}$	V_{RRM}	1800	V
Non-repetitive peak reverse voltage	$T_{vj} = 25^\circ\text{C}$	V_{RSM}	1900	V
Average forward current	$T_C = 100^\circ\text{C}$	$I_{F(AV)}$	136	A
Forward surge current	1/2 cycle, Sine wave, 50Hz	I_{FSM}	3640	A
I^2t value for fusing	$T_{vj} = 25$	I^2t	66200	A^2s
RMS isolation voltage	A.C 50Hz(1s/1min)	V_{ISO}	3600/3000	V
Junction temperature range		T_J	-40 ~ +150	
Storage temperature range		T_{stg}	-40 ~ +125	

JMD136KD18T2W

5°C unless otherwise specified)

Conditions	Symbol	Values			Unit
		Min.	Typ.	Max.	
A, t _p =380	V _F			1.60	V
I _{RRM} , T _{vj} = 25	I _{RRM}			100	A
I _{RRM} , T _{vj} = 150				50	mA
50 , over loss calculation only	V _{TO}			0.85	V
	r _T			1.5	m

°C unless otherwise specified)

Conditions	Symbol	Values			Unit
		Min.	Typ.	Max.	
ode	R _{th(j-c)}		0.19		/W
ode	R _{th(c-s)}		0.12		/W
e and heatsink fixed M5	M	4.25		5.75	N·m
ode connection torque, M6		4.25		5.75	N·m

Package	Weight	Inner Box	Pre Carton
---------	--------	-----------	------------

Typical Electrical & Thermal Characteristics

FIG 1: Forward characteristics(per diode)

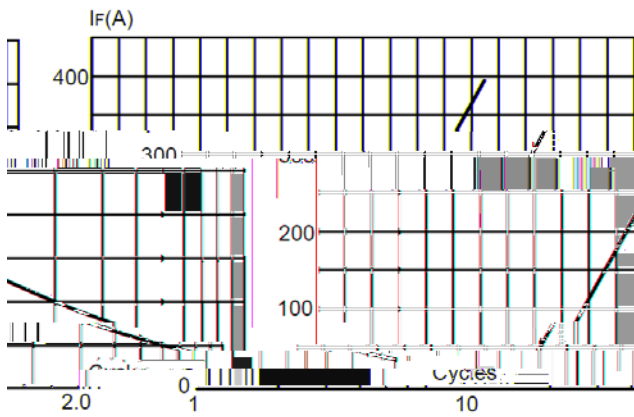


FIG 2: Peak on-state surge current

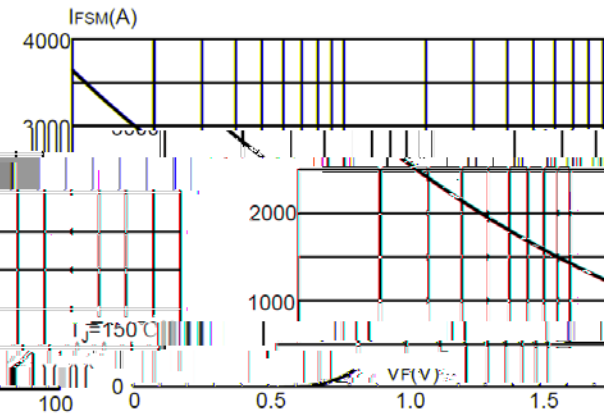


FIG 3: Reverse current



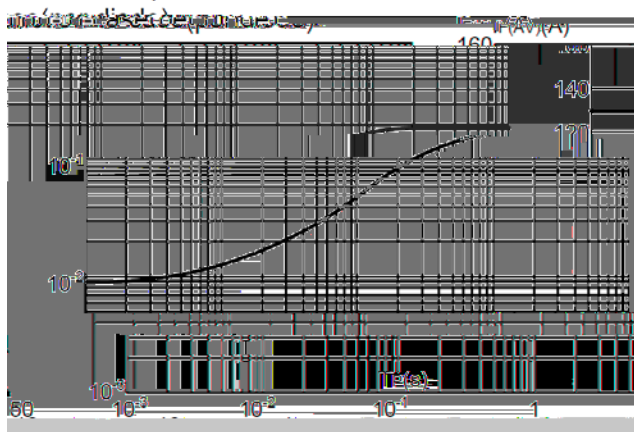


FIG 4: Forward current vs. Case temperature

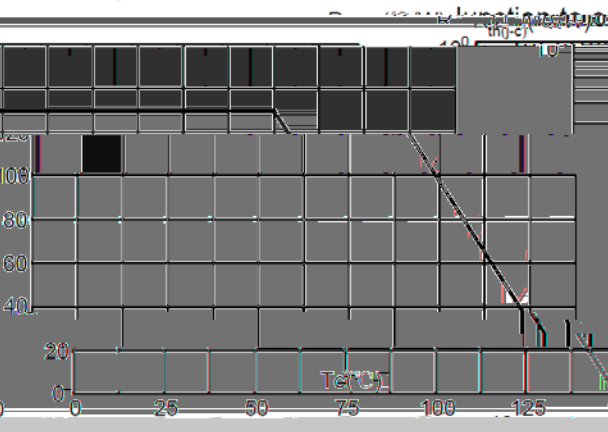

Circuit Diagram

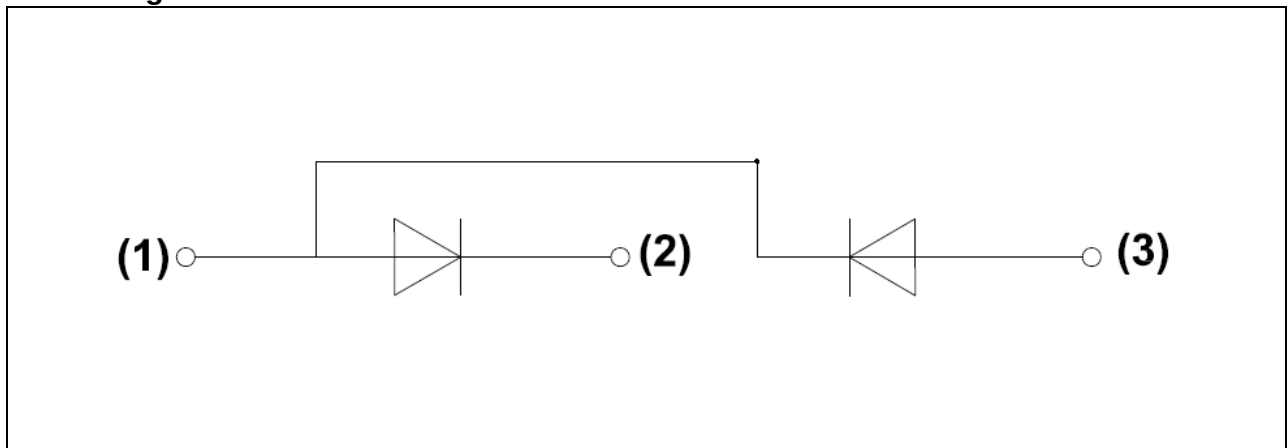

Package Outlines (mm)

